

YewdaleDefiant® thames fabric

The YewdaleDefiant® Thames fabric is designed for areas where privacy is needed as well as sufficient light shading. The weaving process of this flame retardant composition ensures the fabric has a distinguished and stylish look suitable for most applications. With a strong choice of 40 colours, and a convenient range of fabric widths available, the potential applications for YewdaleDefiant® Thames fabric stretches the imagination. Thanks to the 2000mm, 2500mm or 3000mm widths, fabric joins are kept to a minimum to assist in wastage, design and fabrication. This fabric incorporates Biosafe which is the international accreditation standard of our proven antimicrobial formula that has been tested under the most stringent measures to ensure effective inhibiting of infection.

Fabric Composition: 100% Polyester
Fabric Range: 40
Louvre Widths: 89mm / 127mm
Vertical Roll Length: 100m
Roller Fabric Width: 2000mm / 2500mm / 3000mm
 See details overleaf

Roller Fabric Length: 30m
Fabric Thickness: 0.30mm
Fabric Weight: 220 g/m²
Fire Retardancy: Conforms to BS5867, Part 2: Type B 2008

IMO Certified: IMO 2010 FTP CODE ANNEX 1 PART 7

Shading: Dimout. Suitable for computer environments

Moisture Resistance: Suitable for moist conditions

Anti-Bacterial: Biosafe Accreditation

Care Instructions: Wipe with damp sponge. Do not tumble dry; Do not dry clean; Do not iron
 Available in Eden
 Blackout fabric

Options:






this fabric range comes with a full LIFETIME Warranty as standard.

this fabric range comes with a full BIOSAFE Accreditation as standard.

CI/SFB 1976 reference by SFB Agency

(76.7)	X
--------	---

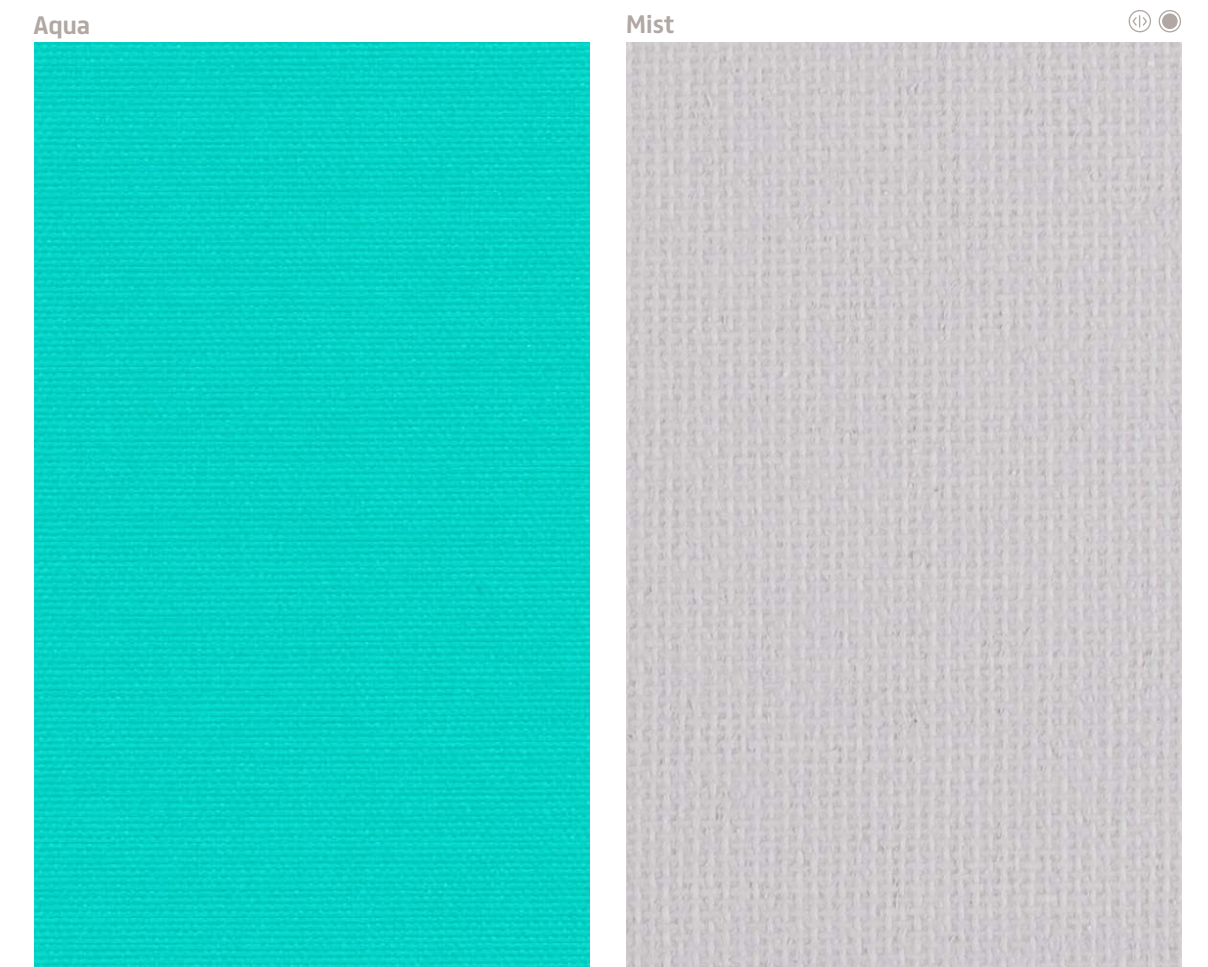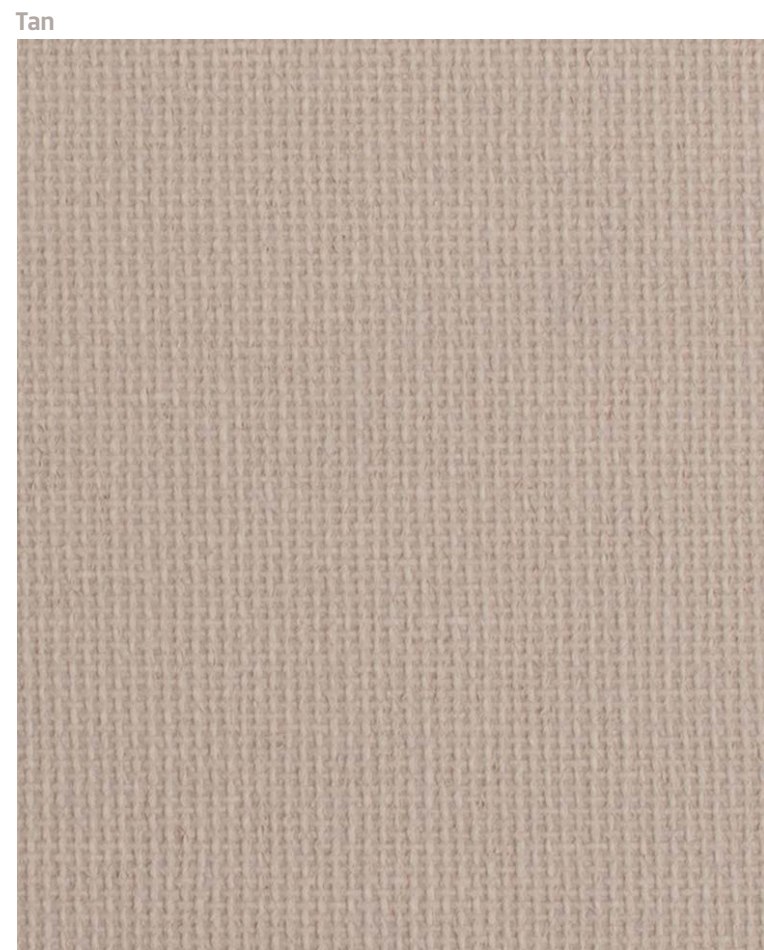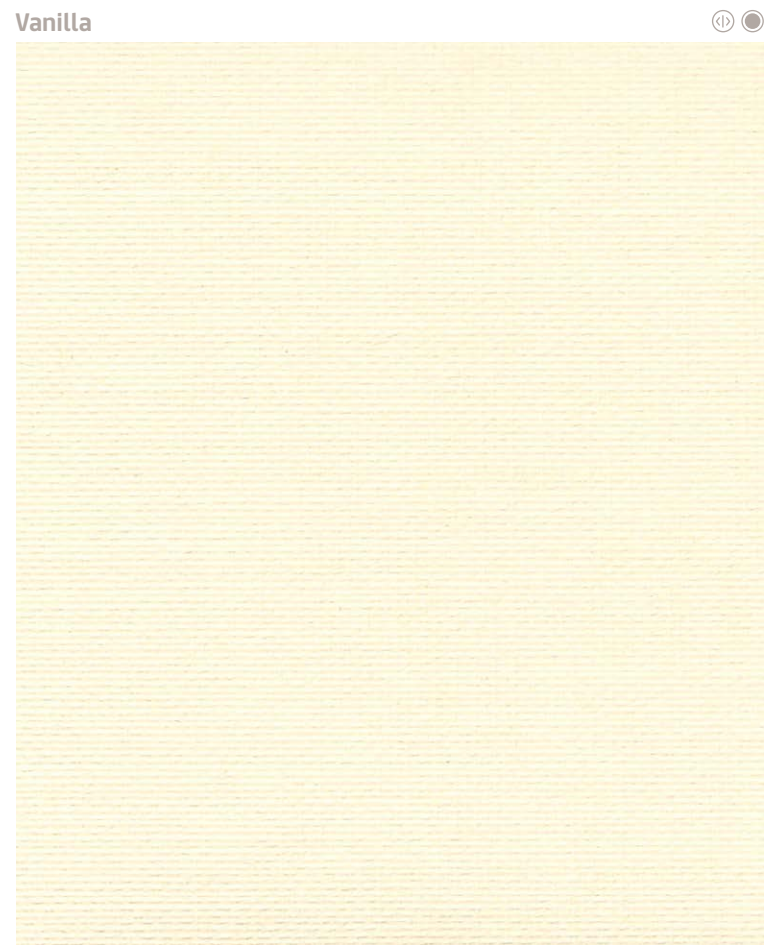

YewdaleDefiant® Thames dimout fabric:



Fire Retardant



Antibacterial



40 Colours



Multi Sized

Perfect for areas where privacy is needed as well as sufficient light shading.
With a distinguished and stylish look, the flame retardant fabric has a choice of 40 colours in a convenient range of widths.

This fabric incorporates Biosafe which is the international accreditation standard of our proven antimicrobial formula that has been tested under the most stringent measures to ensure effective inhibiting of infection.

Please enquire about other fabrics that we have available...



amazon

dart

eden
blackout

eden blackout
white back

roe

roach

harrier

Thames

Dimout fabric



Roller and
louvre dimout fabric
collection for public
and corporate use.

- 40 colours
- Biosafe anti-bacterial
- Wipe clean
- Fire retardant

yewdaleDefiant®
FABRIC AND BLIND SYSTEMS

YewdaleDefiant® thames fabric


shading efficiency

Transmittance is the amount of light and heat transmitted beyond the fabric. The lower the amount, the greater the efficiency.

Block/reflect is the amount of heat and light that is blocked or reflected. The higher the amount, the greater the efficiency.

Absorption is the amount of heat and light absorbed in the fabric. The higher the amount, the lower the efficiency.

Ultraviolet protection illustrates how protective the fabric is against ultraviolet rays. The higher the amount, the greater the effectiveness.

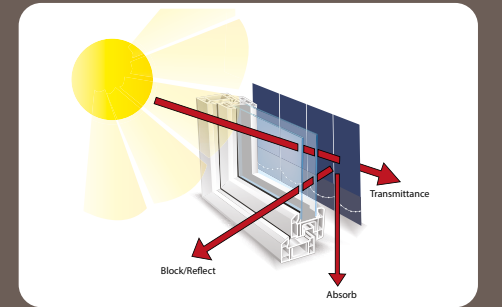

2500 - 3000mm 89 - 2000mm		Heat Transmittance %	Light Transmittance %	Ultraviolet Protection %	Light Absorption %	Heat Reflectance %	Light Reflectance %	Shading Co-efficiency	GTOT	2500 - 3000mm 89 - 2000mm		Heat Transmittance %	Light Transmittance %	Ultraviolet Protection %	Light Absorption %	Heat Reflectance %	Light Reflectance %	Shading Co-efficiency	GTOT
Vanilla		13	10	90	13	73	77	0.35	0.29	Mustard		11	11	100	23	66	66	0.54	0.39
Tan		9	1	100	34	56	42	0.44	0.37	Marsh		9	1	100	76	43	23	0.52	0.44
Linen		12	7	100	18	70	71	0.36	0.30	Lawn		<1	<1	100	80	20	19	0.64	0.54
Stone		6	3	100	47	48	50	0.48	0.41	Pine Green		8	0	100	86	37	14	0.55	0.47
Sandstone		13	9	100	16	71	74	0.36	0.30	Turquoise		8	1	100	71	46	28	0.51	0.43
W. Almond		12	8	90	16	71	73	0.35	0.30	Aqua		9	1	100	70	47	29	0.49	0.42
Rose		13	6	100	33	67	61	0.39	0.33	Mist		5	3	100	41	54	56	0.44	0.38
Dusty Pink		11	3	100	45	63	52	0.41	0.35	Surf		11	4	100	26	63	55	0.40	0.34
Smokey Mauve		9	1	100	67	51	32	0.47	0.40	Marine		1	<1	100	70	28	19	0.59	0.50
Chocolate		1	0	100	87	14	13	0.68	0.58	Cobalt		6	0	100	59	35	10	0.56	0.47
Pink		12	2	100	74	54	24	0.46	0.39	Dark Azure		0	0	100	89	11	7	0.69	0.59
Lilac		11	2	100	61	58	37	0.44	0.37	Sesame		13	12	100	10	77	82	0.32	0.28
Heather		9	1	100	31	60	43	0.41	0.35	Frost		14	12	100	9	78	84	0.32	0.27
Plum		9	0	100	90	44	10	0.52	0.44	Ash		11	3	100	45	61	52	0.42	0.36
Tangerine		11	2	100	72	51	26	0.48	0.41	Stone Grey		2	1	100	56	41	42	0.51	0.44
Scarlet		7	1	100	84	41	15	0.53	0.45	Fossil Grey		<1	10	100	23	27	28	0.71	0.61
Cherry		4	<1	100	62	34	16	0.56	0.47	Graphite		<1	0	100	82	18	19	0.65	0.55
Berry		2	0	100	91	23	9	0.62	0.53	Steel		0	0	100	89	11	12	0.69	0.59
Apple		4	1	100	54	42	42	0.52	0.44	Coal		0	0	100	94	6	6	0.72	0.61
Primrose		13	9	100	18	68	73	0.38	0.32										
Sunshine		12	5	100	38	59	57	0.44	0.37										

OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
A10-0296

Products and specifications liable to change without notice E80E © Yewdale 2023 Performance data has been compiled using available group data and we recommend that fabric is checked for actual suitability for any particular application before use

F42